


NOTES:- 1. Allowed wire sizes are as follows:-
 a. J1. Insulation 2.0 - 2.9 mm Dia. Conductor 0.75 - 1.42 sq mm.
 b. J2 and J3. Insulation 1.6 - 2.4 mm Dia. Conductor 0.3 - 0.56 sq mm.
 c. Wires denoted Insulation 3.0 - 4.0 mm Dia. Conductor 1.5 - 2.5 sq mm.

2. Connect SYSTEM GROUND to Chassis if ECU mounted on chassis.
 If ECU is Engine mounted connect SYSTEM GROUND to Engine block.

WIRE COLOUR CODE

BLK = BLACK	ORG = ORANGE
BLU = BLUE	PNK = PINK
BRN = BROWN	PUR = PURPLE
GRN = GREEN	RED = RED
GRY = GREY	WHT = WHITE
L.BLU = LIGHT BLUE	YEL = YELLOW
L.GRN = LIGHT GREEN	

STRIPES EG:- BLK/WHT = BLACK WITH WHITE STRIPE

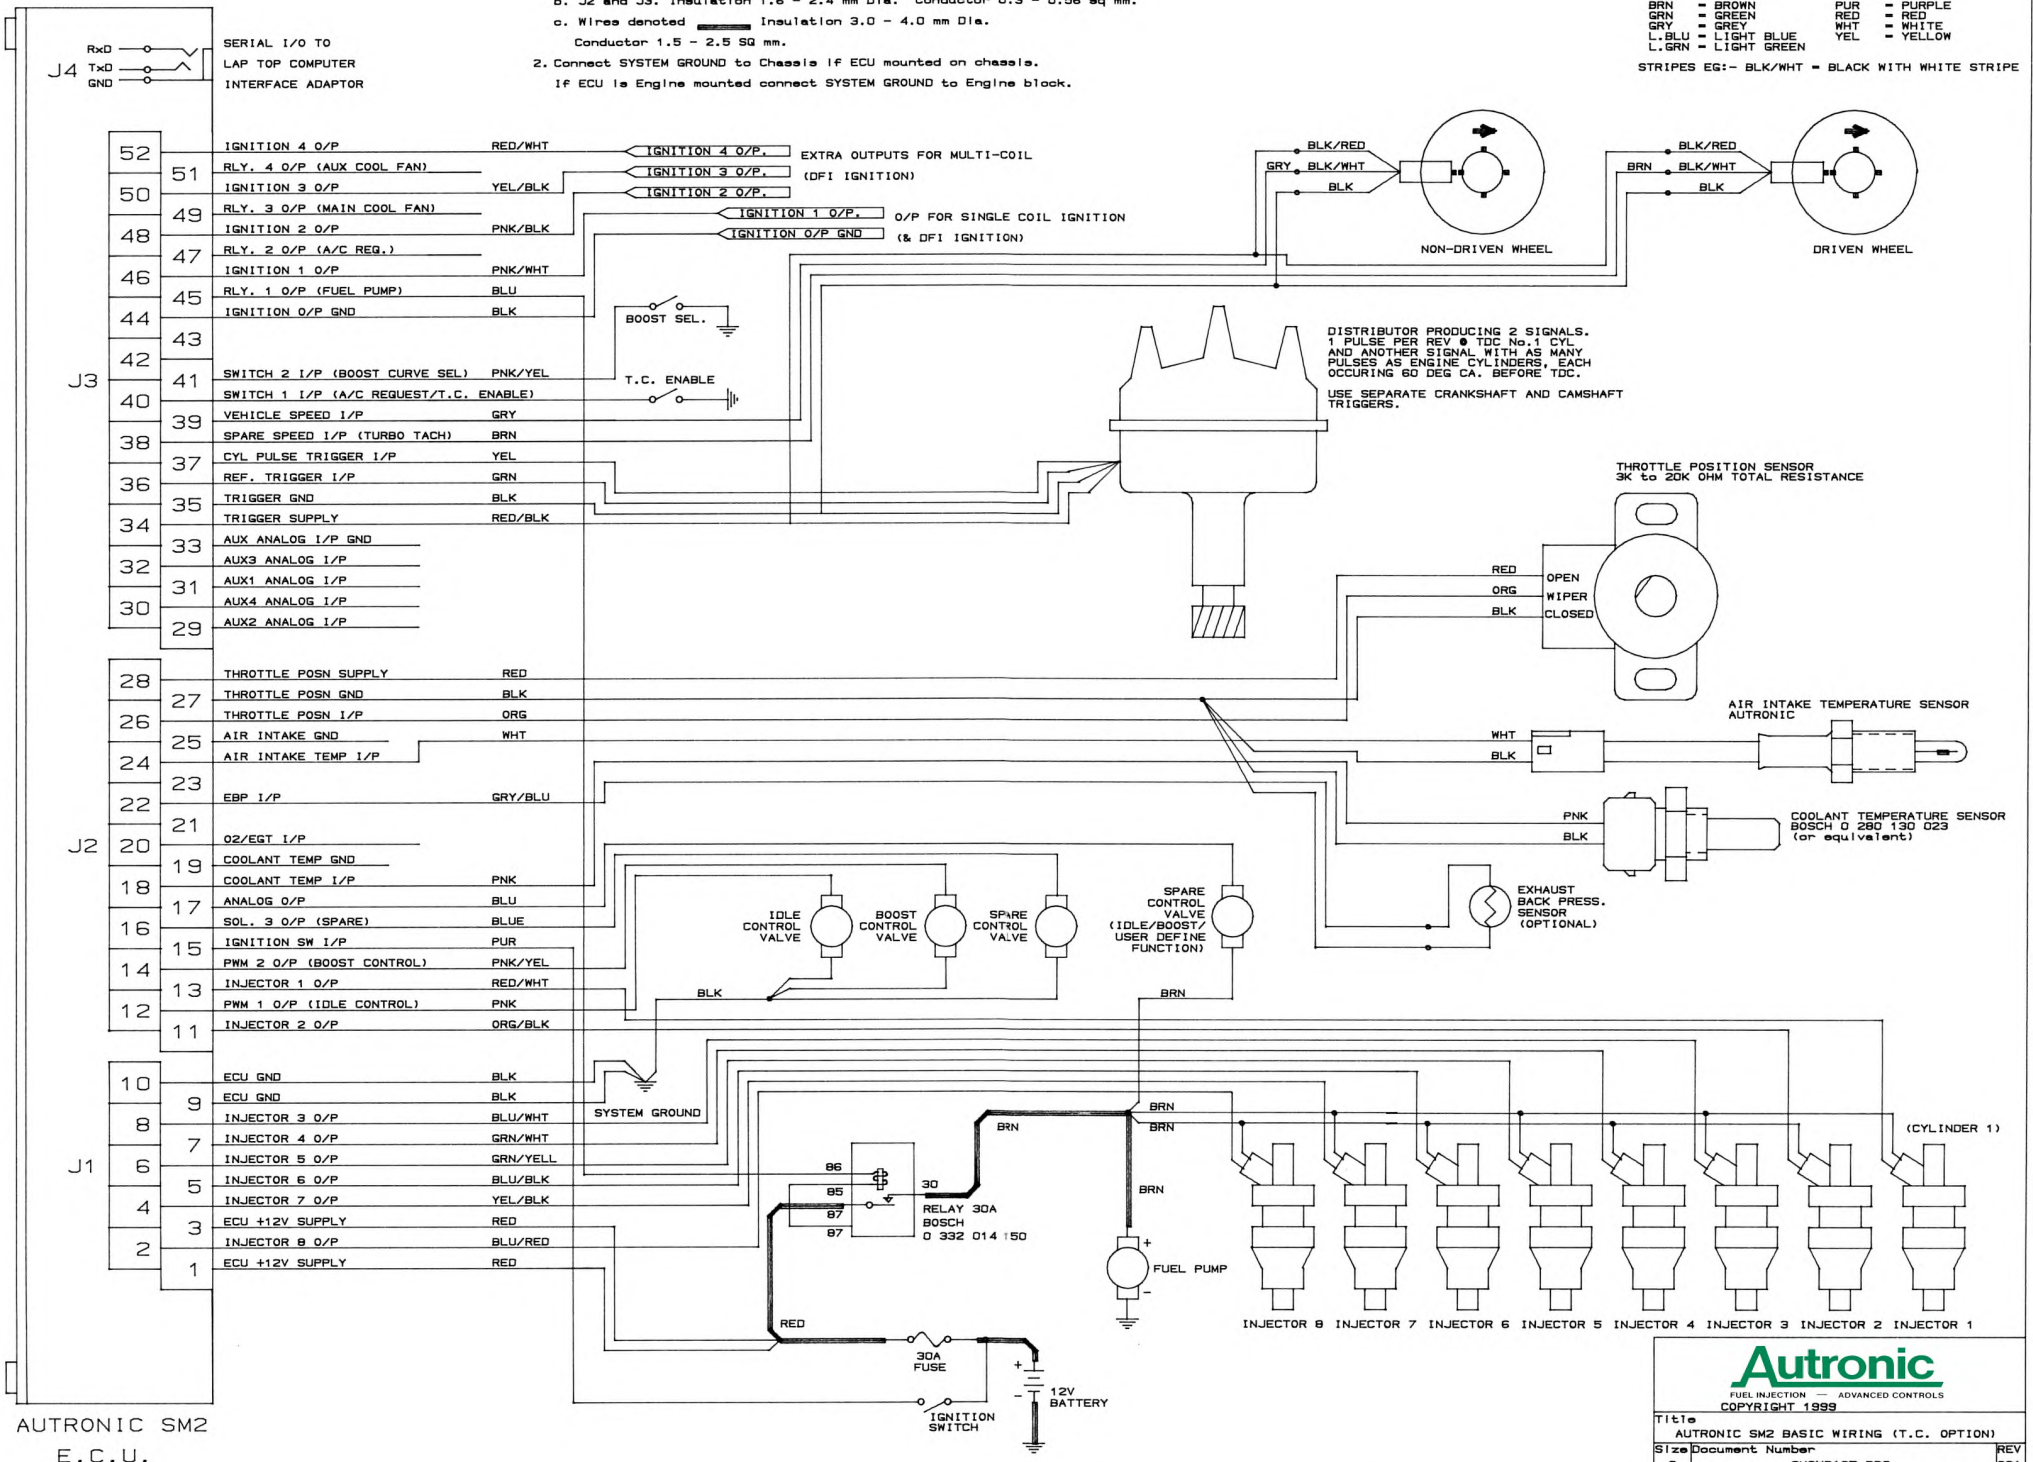

AUTRONIC SM2
E.C.U.

Autronic
 FUEL INJECTION — ADVANCED CONTROLS
 COPYRIGHT 1999

TITLE: AUTRONIC SM2 BASIC WIRING (T.C. OPTION)
 SIZE: Document Number
 C: SM2WR105.DRG
 Date: November 24, 1999 Sheet 1 of 1